

smeg 60cm gas cooktop + flame failure device

COMMERCIAL ONLY PRODUCT



CIR66NES3



CIR66XS3



CIR66EBS3

finish	Black, satin stainless steel, White
size	500mmD x 585mmW x 45mmH
installation	built-in one-piece hob, suits 60cm cabinet
capacity	31.6mj/hour max over four burners <ul style="list-style-type: none"> • 1x ultra-rapid burner (wok) 15 mj/hr • 2x semi-rapid burner 5.9 mj/hr • 1x auxiliary burner 4.8 mj/hr
ignition	automatic electronic
gas input	set for natural gas — regulator supplied adaptable for ULPG — no regulator required
safety	flame failure device fitted to each burner
accessories	2x cast-iron trivets, wok stand, pot rest
warranty	two years parts and labour

ULTRA-RAPID TRIPLE BURNER

Conveniently and ergonomically positioned front-left, this versatile burner, while being designed for perfect wok cooking, also suits the larger stock pots, saucepans and griddles.

SIMMER CONTROL

All burners, including the ultra-rapid triple burner can be adjusted down to a very low, safe flame for the gentlest of low heat simmers.

AUXILIARY BURNER

Also ideally situated, this small multi-purpose burner is accessorised with a pot rest to accommodate even the smallest of utensils such as a coffee percolator or one-cup espresso maker.

Simply depress and turn the control knob of the desired cooking zone for flame ignition.

ELECTRONIC IGNITION

The cooktop is connected with a power cord of 1.3 metre length to be plugged into a GPO located according to installation needs below the benchline. This supplies a continuous stored charge to spark the gas supply to the individual burner of your choice. Simply depress and turn the control of the desired cooking zone for flame ignition.

LOW MAINTENANCE

The seamless hob design allows for easy wipe-over cleaning. The control knobs are removable for cleaning access. Trivets, burner assemblies and wok stand can be washed in warm soapy water.

INSTALLATION

With only a 30mm displacement into the benchtop, the cooktop allows for easy installation underbench of either oven, cupboards or drawers.


FLAME FAILURE

A flame failure device, FFD, with rapid ignition is fitted to each burner. The FFD ensures that should a flame be extinguished accidentally — the gas supply to the specific burner(s) is stopped. For absolute safety, the burner(s) can only be reignited by physically resetting the control knob(s) to the OFF position and then following normal ignition procedure.

smeg 60cm gas cooktop + flame failure device

COMMERCIAL ONLY PRODUCT

NOTE: these drawings are not to scale — they are to assist only

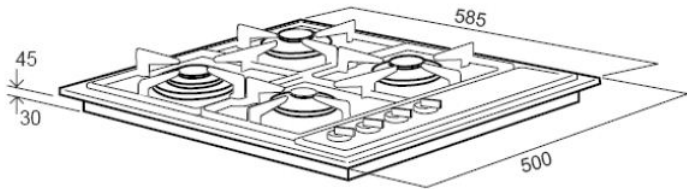

height 60mm includes trivets
width 585mm
depth 500mm

CUTOUT

height 30mm
width 555mm
depth 478mm

packaged dimensions 120x550x600mm


net weight 10kg

gross weight 11kg

maximum gas input rate 31.6mj/hr
 • 1/2" BSP gas inlet connection
 • gas connection located right-hand rear corner
 • 1/2" BSP 1.0 kPa natural gas regulator is supplied with natural gas hobs
 • LPG adaptable, no regulator required

ignition 1.3 metre connected power cord with 3-pin plug, suitable for standard 10 amp GPO

supplied clips, seal, instructions for installation, operation and maintenance

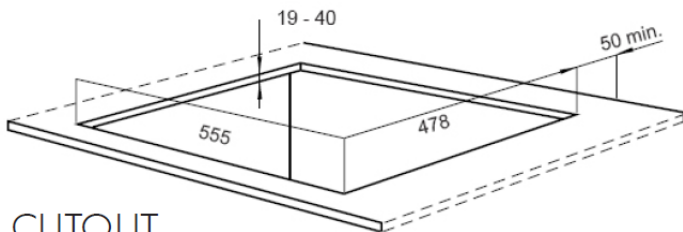

CUTOUT

