



<b>EAN</b>	9345025000958
finish	stainless steel
dimensions	515mm diameter
installation	island
motor	1 x 340W
air extraction	recirculate to kitchen
capacity	540m <sup>3</sup> /hr (IEC 61591: p=0) 520m <sup>3</sup> /hr (IEC 61591: p=1)
noise rating	49-68 dBA (IEC 60704-3)
illumination	4 X 20W halogen globes
speeds	three, electronic touch control + intensive*
power	220-240V, 50Hz
supplied	1 x aluminium grease filters, 1 x charcoal filter, remote control
optional	charcoal filter, part # 133.0267.277

#### ENERGY DIFFUSER

Reduces noise level by up to 3 dBA, and increases rangehood efficiency by 30%.

#### DELAYED SWITCH OFF


Motor will run at a low speed for approximately 10 minutes for complete elimination of odours. Switches off automatically.

#### KEY 24

Activates the motor to run at a low level for 24 hours for continuous air renewal.

p = 0 → airflow direct out of motor housing  
p = 1 → airflow after 1m & 90° bend + 1m

\*INTENSIVE: the Intensive Speed function activates maximum air extraction for 10 minutes to meet the needs heavy-duty cooking, such as stir-fry.

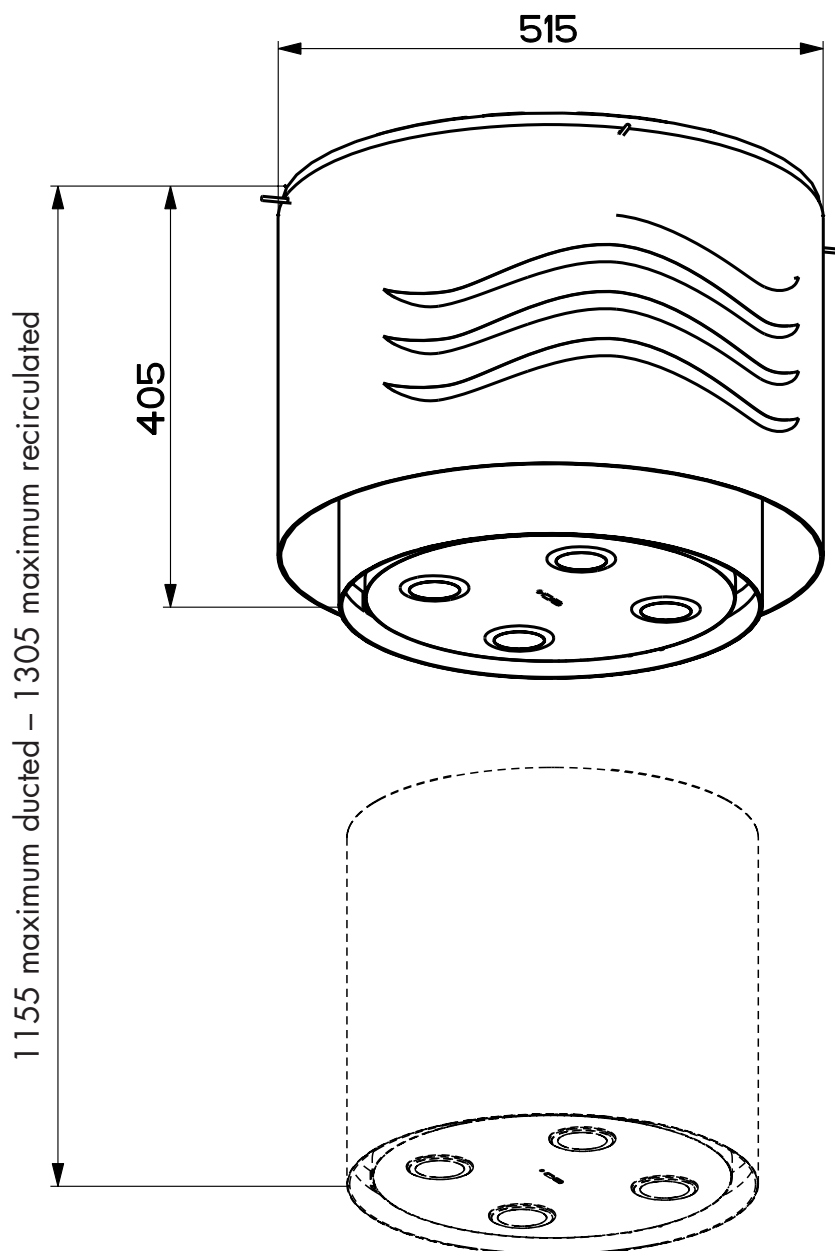

**PLEASE NOTE: drawings are not to scale. They are to assist only.**