
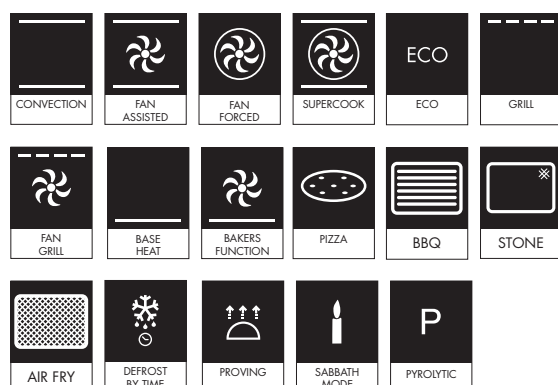


SOPA6602TNR

60CM DOLCE STIL NOVO PYROLYTIC OVEN

MADE IN ITALY
Since 1948

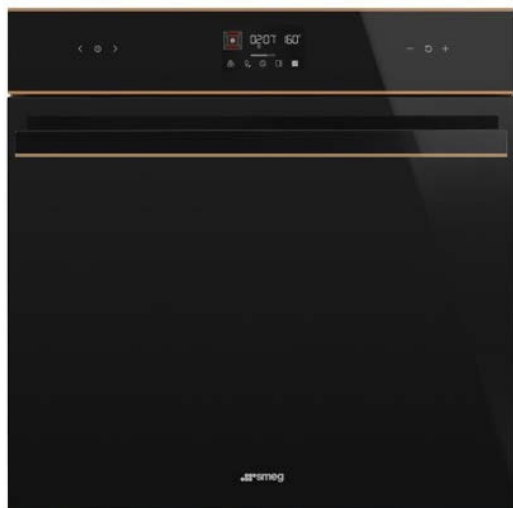

Dimensions	597mmW x 548mmD x 592mmH (excludes door and handle)
Finish	Black eclipse glass with copper trim
Total functions	16
Warranty	Five years parts and labour

SOFT OPEN & CLOSE DOOR

The new soft open and close mechanism on Smeg's oven doors ensures a two-stage soft open and quiet close. Smeg's quality hinges also ensure the door will not drop on opening, an intrinsic safety feature.

EVER CLEAN ENAMEL

The superior quality of Smeg's signature Ever Clean enamel, which is highly durable and easy to clean, is the result of nearly 70 years of enameling expertise; ensuring long-life performance of every Smeg oven.



SOPA6602TNR


60CM DOLCE STIL NOVO PYROLYTIC OVEN

MADE IN ITALY
Since 1948

OVEN FEATURES

Dimensions	597mmW x 548mmD x 592mmH (excludes door and handle)
Finish	Black eclipse glass with copper trim
Total functions	16
Display	EvoScreen
Cavity	Ever Clean Enamel
Gross Capacity	78L
Net Capacity	68L
Cooking levels	5
Thermostat	30-280°C
Installation	Built-in
Programmability	Fully programmable
Cleaning	Pyrolytic
Lighting	2 x 40W halogen
Safety	Cool Door technology, thermal protection system, child safety lock, controls lock
Power	220-240V, 50/60Hz 3000W 13A Connection
Warranty	Five years parts and labour

OVEN FUNCTIONS

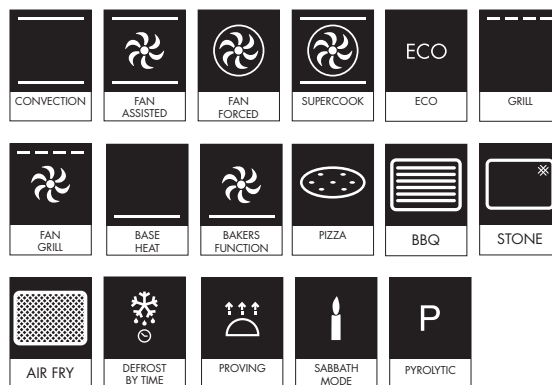


SUPPLIED ACCESSORIES

- 1 x Chrome grill insert
- 1 x Chrome shelves
- 1 x 20mm enamelled baking tray
- 1 x 50mm enamelled baking tray
- 1 x Partial telescopic guides

OPTIONAL ACCESSORIES

- ET20 - Enamelled tray - 20mm deep
- ET50 - Enamelled tray - 50mm deep
- GTP2 - Partial telescopic guides
- GTT2 - Total telescopic guides
- BBQ - BBQ Tray
- AIRFRY - Airfry rack
- STONE - Square refractory stone
- PALPZ - Pizza shovel with foldable handle

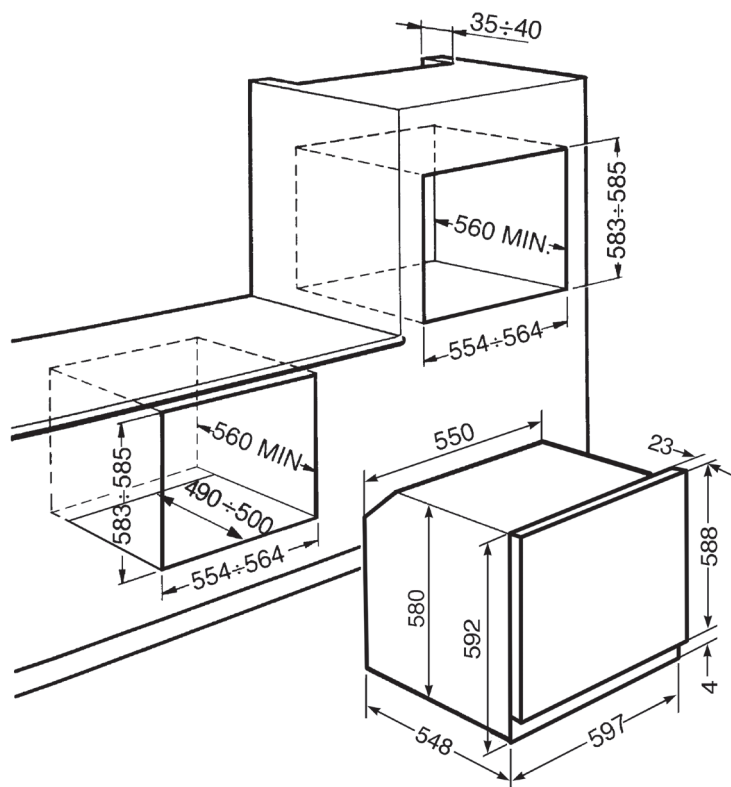


SOPA6602TNR

60CM DOLCE STIL NOVO PYROLYTIC OVEN

MADE IN ITALY
Since 1948



Dimensions	597mmW x 548mmD x 592mmH (excludes door and handle)
Power	220–240V, 50/60Hz 3000W 13A Connection

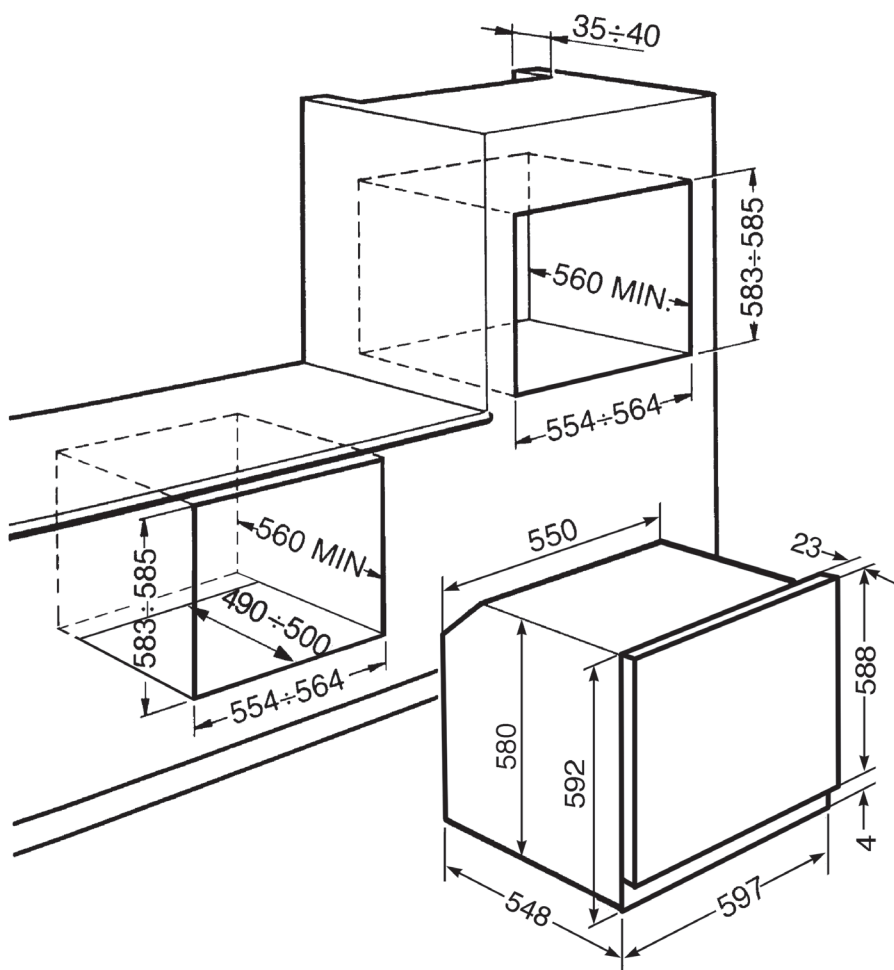

PLEASE NOTE: Drawings are not to scale. They are to assist only.

CABINETRY: Cut-outs are indicated for proud mounting. For flush mounting please refer to a specialist installer.

VENTILATION: Ovens and compact ovens require a 35-40mm ventilation gap at the rear of the cabinet.

WARNING: Technical specifications and product sizes can be varied by the manufacturer, without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.