

DWAI315XT smeg semi-integrated dishwasher, TALL TANK



EAN 8017709184032

size	598mmW x 858mmH (928mmH max) x 570mmD
capacity	15 placesettings
finish	fingerprint-proof stainless steel control panel
programs	five wash programs — soak, normal ECO, ECO, auto 60-70, ultraclean four specialised programs — speedy 27 minutes, ECO quick, normal quick, strong and fast
baskets	grey rilson upper: flexi-duo basket middle: 3-level adjustment, EasyGlide lower: completely foldable with glass holder, cutlery basket
wash system	orbital ceiling spray upper spray arm six wash directions
water softener	electronic adjustable
temperatures	five (38,45,50,65,70°C)
water connection	single, cold/hot water max 60°C
timer	1–24 hour delay timer
filtration	5-stage water filtration system
drying	natural condenser with auto door open at end of cycle
safety	TOTAL ACQUASTOP LED on/off light end-cycle acoustic indicator self-balancing hinges
noise	42 dBA
water	9.8 litres
power	1.9 kWh, 10 amps 230–240V, 50Hz

ORBITAL WASH SYSTEM

Smeg's orbital wash system has two spray arms which operate simultaneously in opposite directions to ensure water is evenly distributed throughout the inner cavity for a perfect wash.

DELAY START TIMER

Delay Start option allows for up to 24-hours delay start — allowing you to take advantage of off-peak energy usage times.

TOTAL ACQUASTOP

Acquastop is a water safety device that operates when the dishwasher is not in operation by restricting mains pressure at the tap, and not at the dishwasher.

ULTRAFAST PROGRAM

The Ultrafast program has been developed especially for slightly dirty dishes that are to be washed immediately after use. This program takes only 27 minutes.

AQUATEST


Uses a turbidity sensor to measure suspended solids in water. This system ensures minimum water and energy consumption, regardless of the level of soiling.


ENERSAVE

This option reduces the temperature of final rinse, saving energy. It is activated after selecting the desired program. The door opens at the end of washing to assist drying.



DWAI315XT smeg semi-integrated dishwasher, TALL TANK

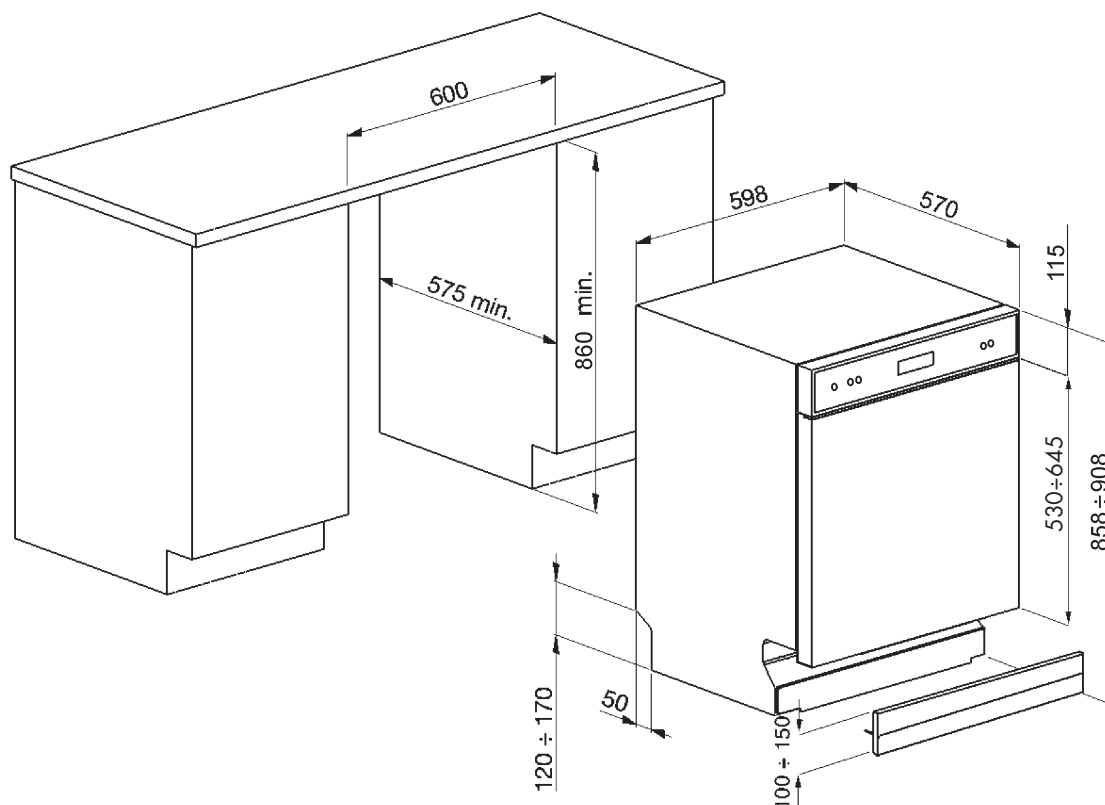

PROGRAM	LOAD	PROGRAM PROGRESS	DURATION	CONSUMPTION	
			minutes	water litres	power kWh
SOAK 	pans and dishes awaiting completion of load	cold prewash	15	3.5	0.02
NORMAL ECO 45 	crockery and cutlery normally soiled	cold prewash wash at 49°C rinse at 41°C dry	140	9.8	0.65
ECO 	dishes with normal dirt, with dried-on residue	cold prewash wash at 55°C cold rinse rinse at 70°C dry	100	11	1.3
AUTO 60-70 	pans and dishes with normal dirt, dried-on residue	the prewash and washing temperatures are decided automatically, depending on the type and amount of dirt; the program ends with a final drying phase			
SUPER 	very dirty pans and dishes, with dried-on residue	hot prewash wash at 70°C code rinse (2) rinse at 70°C dry	135	15.5	1.60

PLEASE NOTE: drawings are not to scale. They are to assist only.